

# **GEO** Screentech Srl

## Screening Solutions



**WINDSHIFTER EOLO MK**

**RELIABILITY - FLEXIBILITY - EFFICIENCY**

**SEMI-TRAILER - HOOKLIFT - STATIONARY**



## MAXIMUM POSSIBILITY OF ADJUSTMENTS, CUSTOMIZED CONFORMATIONS, EFFECTIVENESS OF SOLUTIONS

EXTENDABLE EXPANSION CHAMBER

HEAVY MATERIAL  
DISCHARGE BELT



SEPARATION DRUM

INTEGRATED BLOWER  
AND SUCTION SYSTEM

Integrated blower system and pressure management allow adjustment of the position, direction, intensity and amplitude of the air flow. The variable speed feeding belt can be positioned in any point relative to the separation drum. The combination of the adjustment of these elements allows to separate even the most complicated materials.

### WINDSHIFTER EOLO MK

Extreme flexibility and maximum efficiency are the main features of the EOLO MK line. The possibility of having a totally customized product allows for excellent results with any types of materials to be separated. The wide range of models and the simplicity of the accessories makes it suitable in any situation where a separation of materials by specific weight is required.

FEEDING BELT ADJUSTABLE  
IN ANY POSITION

ADJUSTABLE SPEED

EASE OF ACCESS




HEIGHT ADJUSTMENT

MOVEMENT KIT




## WINDSHIFTER EOLO MK

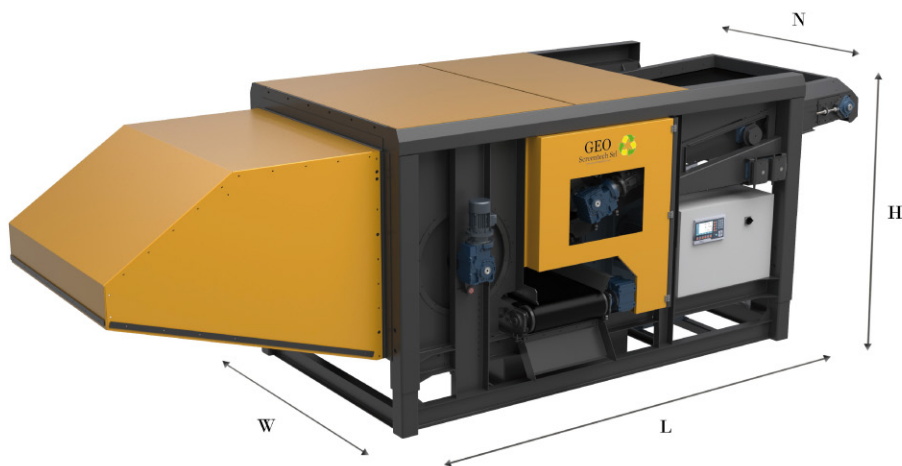

### mod. EOLO MK

N: FROM 1000 TO 1600 MM  
H: FROM 2200 TO 3600 MM  
L: FROM 2400 TO 4000 MM  
W: FROM 1800 TO 2500 MM  
BLOWER: FROM 11 TO 30 KW  
SEPARATOR DRUM Ø:820 MM  
WORKING CAPACITY: UP TO 300 M<sup>3</sup>/H

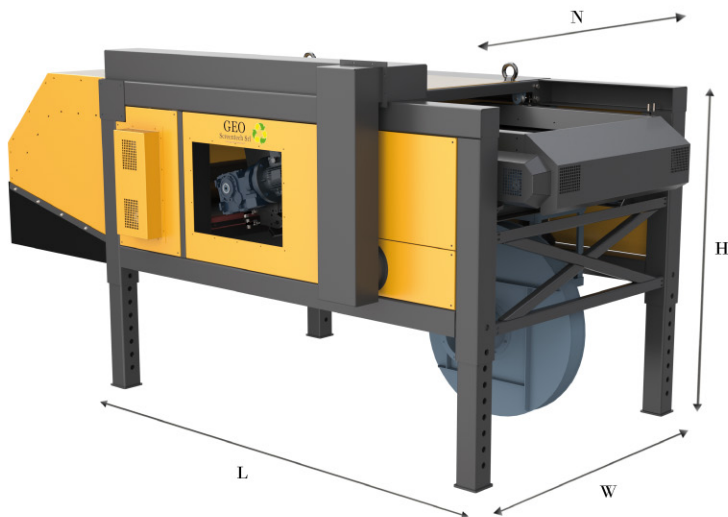

### mod. EOLO K

N: FROM 800 TO 1600 MM  
H: FROM 1800 TO 3000 MM  
L: FROM 2000 TO 3200 MM  
W: FROM 1600 TO 2500 MM  
BLOWER: FROM 11 TO 30 KW  
SEPARATOR DRUM Ø:620 MM  
WORKING CAPACITY: UP TO 200 M<sup>3</sup>/H

**GEO** Screentech Srl

Via dell'industria 67  
36030 Sarcedo (VI) Italia  
P.I. 04242050245

info@geo-screentech.com  
www.geo-screentech.com  
+39 0445 300583

